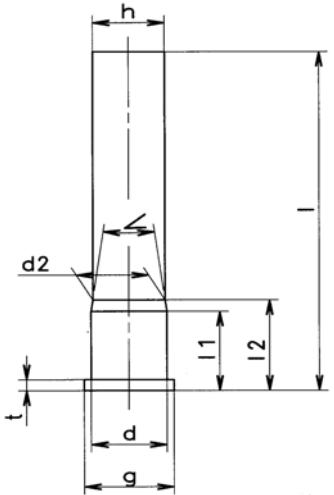
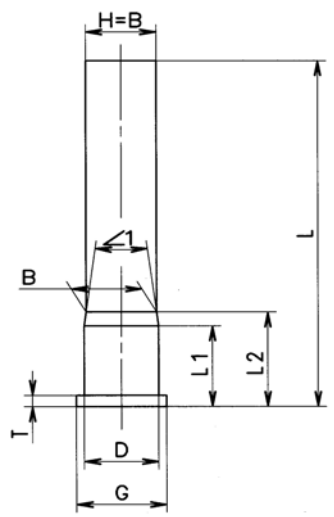


C.I.P.	Kal. 9 C.F. Mori Ursprungsland: IT	TAB.	VII																						
		Datum	04-09-27																						
		Revision	06-09-19																						
		<p>PATRONE MAXIMUM</p> <p>Dimens. Wert Toler.</p> <p>d¹⁾ = 8.80 - 0.10 g = 10.45 - 0.30 t¹⁾ = 1.45 - 0.20 d2 = 8.40 h = 8.35 - 0.35 l1 = 10.50 l2 = 12.00 α = 15°11'24" l = 45.00 - 2.50</p>																							
				<p>PATRONENLAGER MINIMUM</p> <p>Dimens. Wert Toler.</p> <p>D¹⁾ = 8.85 + 0.10 G = 10.70 + 0.20 T¹⁾ = 1.45 + 0.10 D1 = 8.80 B¹⁾ = 8.38 + 0.50 H¹⁾ = 8.38 + 0.10 α1¹⁾ = 13°18' max L1 = 10.50 L2 = 12.30 L = 45.10 + 2.00</p> <table border="0" style="width: 100%;"> <tr> <td colspan="4" style="text-align: center;">Gasdruck Wandler</td> </tr> <tr> <td style="text-align: center;">Pmax</td> <td style="text-align: center;">PK</td> <td style="text-align: center;">PE</td> <td style="text-align: center;">M</td> </tr> <tr> <td colspan="4" style="text-align: center;">bar</td> </tr> <tr> <td style="text-align: center;">830</td> <td style="text-align: center;">950</td> <td style="text-align: center;">1040</td> <td style="text-align: center;">9.00</td> </tr> </table> <p>Verschlussabstand</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 50%;">Fe = 0.10</td> <td style="width: 50%;">Messlauf</td> </tr> <tr> <td>Fe¹⁾ = 0.20</td> <td>mit Basküle</td> </tr> <tr> <td>Fe¹⁾ = 0.35</td> <td>Automat</td> </tr> </table>		Gasdruck Wandler				Pmax	PK	PE	M	bar				830	950	1040	9.00	Fe = 0.10	Messlauf	Fe ¹⁾ = 0.20	mit Basküle
Gasdruck Wandler																									
Pmax	PK	PE	M																						
bar																									
830	950	1040	9.00																						
Fe = 0.10	Messlauf																								
Fe ¹⁾ = 0.20	mit Basküle																								
Fe ¹⁾ = 0.35	Automat																								
<p>Maßstab 1:1</p>		<p>Dimensionen in « mm » Dimensionen und Toleranzen für Messläufe: Siehe Anhang CR 4.</p>		<p>Bemerkung : 1) Kontrolle aus Sicherheitsgründen</p>																					